

ADJUSTABLE PEDESTAL IPV 15/19

SPECIFICATION SHEET

Description:	Consists of two pieces. The bottom piece has 8 vertical reinforcement ribs and an injected rubber underlayer. The top piece has 8 recesses to block the upper plate.
Color:	Black
Support Area:	support 300 cm ²
Outside Diameter:	230 mm
Weight:	393 g/piece
Height adjustability:	150 – 180 mm








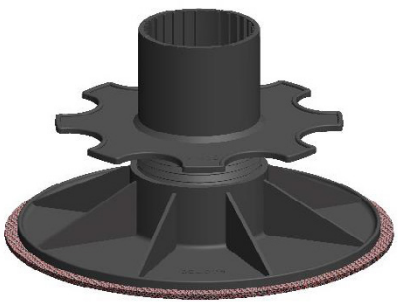







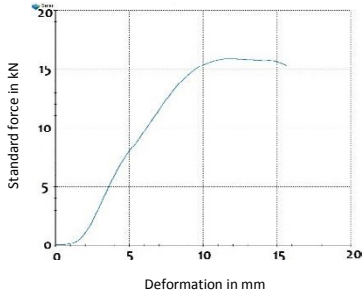

	Recycled material
	Weatherproof
	Resistant to temperatures between -25 / + 70 ° C
	Compliance with the standard DTU 43.1 and 51.4
	Certificates CSTC / CSTC No., DE, ATA, RE: DE611XB185 / SC0918
	Capacity 800 kg / unit
	PP Compound

Image	Support plate	Optional pieces
	<p>For tiles: C3/4T</p>  <p>For wood: CP+</p>  <p>Others: CO</p> 	<p>Rallonge F20</p>  <p>Rallonge F35</p>  <p>Rallonge AF100</p>  <p>Fitting pieces 1, 2 mm</p> 
Load per m ²	Pressure test (Zwick)	Packing
<p>Every 600 mm length/width – 1.350 kg/m². Every 500 mm length/width – 2.400 kg/m². Every 400 mm length/width – 3.750 kg/m².</p> <p>Tiles 600x600 mm.(2,25 pieces/m²) – 1.350 kg/m². Tiles 500x500 mm.(4,00 pieces/m²) – 2.400 kg/m². Tiles 400x400 mm.(6,25 pieces/m²) – 3.750 kg/m².</p>	<p>1560kg</p> 	<p>Bag: Dimensions: 1450 x 750 mm Gross weight: 16 kg Quantity: 40 pieces/bag</p>  <p>Pallet: Dimensions: 1200 x 1100 x 2000 mm Gross weight: 180 kg Quantity: 10 bags/pallet - 400 pieces</p>

