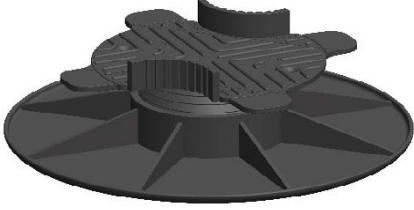



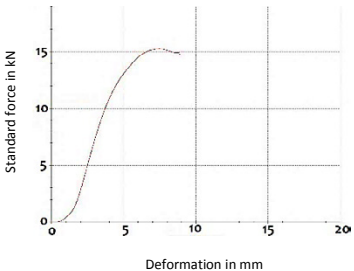


ADJUSTABLE PEDESTAL PV 3/5/CP+

SPECIFICATION SHEET

Description: Consists of two pieces. The bottom piece has 8 vertical reinforcement ribs. The top piece has 2 vertical curved spacers.	
Color:	Black
Support Area:	support 300 cm ²
Outside Diameter:	215 mm
Weight:	184 g/pieces
Height adjustability:	32 – 48 mm

	Recycled material
	Weatherproof
	Resistant to temperatures between -25 / + 70 ° C
	Compliance with the standard DTU 43.1 and 51.4
	Certificates CSTC / CSTC No., DE, ATA, RE: DE611XB185 / SC0918
	Capacity 800 kg / unit
	PP Compound

Image	Support plate	Optional pieces
	For tiles: PV3/5/C3/4T  For bois: PV3/5/CP+  Others: PV3/5/CO 	Extension piece AF100  Slope corrector HS2  Fitting pieces 1, 2 mm 
Load per m ²	Pressure test (Zwick)	Packing
Every 600 mm length/width – 1.350 kg/m ² . Every 500 mm length/width – 2.400 kg/m ² . Every 400 mm length/width – 3.750 kg/m ² . Tiles 600x600 mm.(2,25 pieces/m ²) – 1.350 kg/m ² . Tiles 500x500 mm.(4,00 pieces/m ²) – 2.400 kg/m ² . Tiles 400x400 mm.(6,25 pieces/m ²) – 3.750 kg/m ² .	1690kg 	Bag: Dimension: 1450 x 750 mm Gross weight: 10 kg Quantity: 50 pieces/bag  Pallet: Dimensions: 1200 x 1100 x 2000 mm Gross weight: 210 kg Quantity: 20 bags/pallet - 1000 pieces

