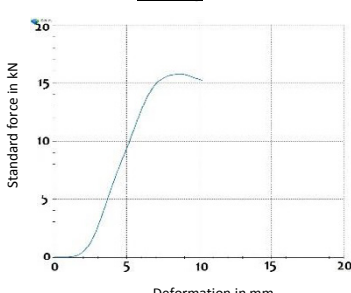


ADJUSTABLE PEDESTAL PV 5/9

SPECIFICATION SHEET

Description:	Consists of two pieces. The bottom piece has 8 vertical reinforcement ribs. The top piece has 8 recesses to block the upper plate.
Color:	Black
Support Area:	support 300 cm ²
Outside Diameter:	215 mm
Weight:	215 g/piece
Height adjustability:	51 – 84 mm

	Recycled material
	Weatherproof
	Resistant to temperatures between -25 / + 70 ° C
	Compliance with the standard DTU 43.1 and 51.4
	Certificates CSTC / CSTC No., DE, ATA, RE: DE611XB185 / SC0918
	Capacity 800 kg / unit
	PP Compound

Image	Support plate	Optional pieces
	For tiles: C3/4T	Rallonge F20
	For wood: CP+	Rallonge F35
	Others: C0	Rallonge AF100
		Slope corrector HS2
		Fitting pieces 1, 2 mm
Load per m ²	Pressure test (Zwick)	Packing
Every 600 mm length/width – 1.350 kg/m ² . Every 500 mm length/width – 2.400 kg/m ² . Every 400 mm length/width – 3.750 kg/m ² . Tiles 600x600 mm.(2,25 pieces/m ²) – 1.350 kg/m ² . Tiles 500x500 mm.(4,00 pieces/m ²) – 2.400 kg/m ² . Tiles 400x400 mm.(6,25 pieces/m ²) – 3.750 kg/m ² .	1560kg 	<u>Bag:</u> Dimensions: 1450 x 750 mm Gross weight: 11 kg Quantity: 50 pieces/bag  <u>Pallet:</u> Dimensions: 1200 x 1100 x 2000 mm Gross weight: 186 kg Quantity: 16 bags/pallet - 800 pieces

