

## ADJUSTABLE TERRACE SUPPORT AK 5/8

Description:	Consists of 2 pieces. The bottom piece has 8 vertical reinforcement ribs and has 1 straight side so that it can be used against a wall. The top piece has 8 recesses to be able to block the upper plate.
Color:	Black
Support area:	210 cm <sup>2</sup>
Outside diameter:	164/215 mm
Weight:	188 g/piece
Adjustable height:	50 – 80 mm








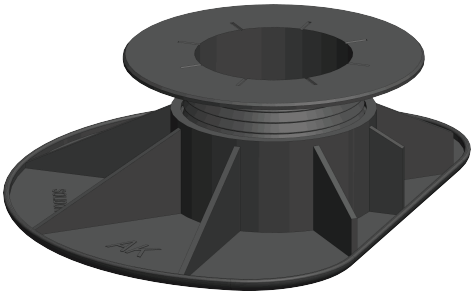








	Recycled material
	Weatherproof
	Resistant to temperatures between -25 and +70°C
	Compliant with the DTU standard 43.1 and 51.4
	Certificate WTCB/CSTC N°, DE, ATA, RE: DE611XB185/SC0918
	Capacity: 2.400 kg/m <sup>2</sup>
	PP compound

Image	Support Plates	Accessories
	For tiles: <b>C2/4T</b>  <b>C3/4T</b>  <b>C3/4T BT</b>  For timber: <b>CP+</b>  Other: <b>C0</b> 	Extension piece <b>F30</b>  Extension piece <b>AF100</b>  <b>Fitting pieces</b> 1 - 3 mm 
	<b>Load/m<sup>2</sup></b> Every 600 mm length/width – 1.350 kg/m <sup>2</sup> Every 500 mm length/width – 2.400 kg/m <sup>2</sup> Every 400 mm length/width – 3.750 kg/m <sup>2</sup> Tiles 600 x 600 mm (2,25 pieces/m <sup>2</sup> ) – 1.350 kg/m <sup>2</sup> Tiles 500 x 500 mm (4,00 pieces/m <sup>2</sup> ) – 2.400 kg/m <sup>2</sup> Tiles 400 x 400 mm (6,25 pieces/m <sup>2</sup> ) – 3.750 kg/m <sup>2</sup>	<b>Pressure Test (Zwick)</b> <b>1560 kg</b> 