


ADJUSTABLE PEDESTAL PV 5/8

TECHNICAL DATASHEET

SPECIFICATIONS

Consists of 2 pieces. The bottom piece has 8 vertical reinforcement ribs. The top piece has 8 recesses to be able to block the upper plate.

Color	Black
Support area	300 cm ²
Outside diameter	215 mm
Weight	228 g/piece
Adjustable height	50 - 80 mm



Recycled material

Weatherproof

Resistant to temperatures between -25 and +70°C


PP compound

Compliant with the DTU standard 43.1 and 51.4

Capacity: 2.400 kg/m²

Tested on Broof T4 and BFL-S1

OTHER PEDESTALS



PEDESTALS WALL FINISHING



TOP PLATES

For tiles




C2/4T



C3/4T



C6/4T



STICKSOL

For wood



CPV+

Other



CO

ACCESSORIES

Extension piece



F30



AF100

Slope corrector



HS2



HA5

Fitting pieces



1 - 3 mm

PACKAGING

Bag

Dimensions	1.450 x 750 mm
Gross weight	11,4 kg
Quantity	50 pieces/bag

Pallet

Dimensions	1.200 x 1.100 x 2.200 mm
Gross weight	197 kg
Quantity	16 pieces/bag – 800 pieces



ADJUSTABLE PEDESTAL PV 5/8

TECHNICAL
DATASHEET

LOAD/M²

Wood


Every 600 mm l/w	1.350 kg/m ²
Every 500 mm l/w	2.400 kg/m ²
Every 400 mm l/w	3.750 kg/m ²

Tiles

600 x 600 mm (2,25 pcs/m ²)	1.350 kg/m ²
500 x 500 mm (4,00 pcs/m ²)	2.400 kg/m ²
400 x 400 mm (6,25 pcs/m ²)	3.750 kg/m ²

PRESSURE TEST (ZWICK)

1.560 kg

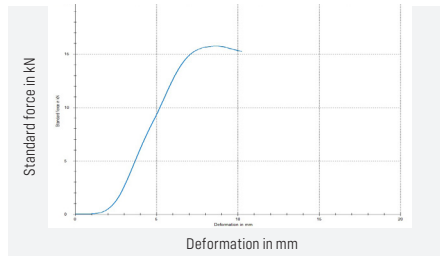

Calculation valid with correct placement and use without extension pieces. For higher construction with extension piece, these results are not valid. Minimum 1.5 threads must still be threaded into the base piece.

