


# EXADECK


Whiteriver

composite for living

## INSTALLATION GUIDE

## PORCELAIN DECKING

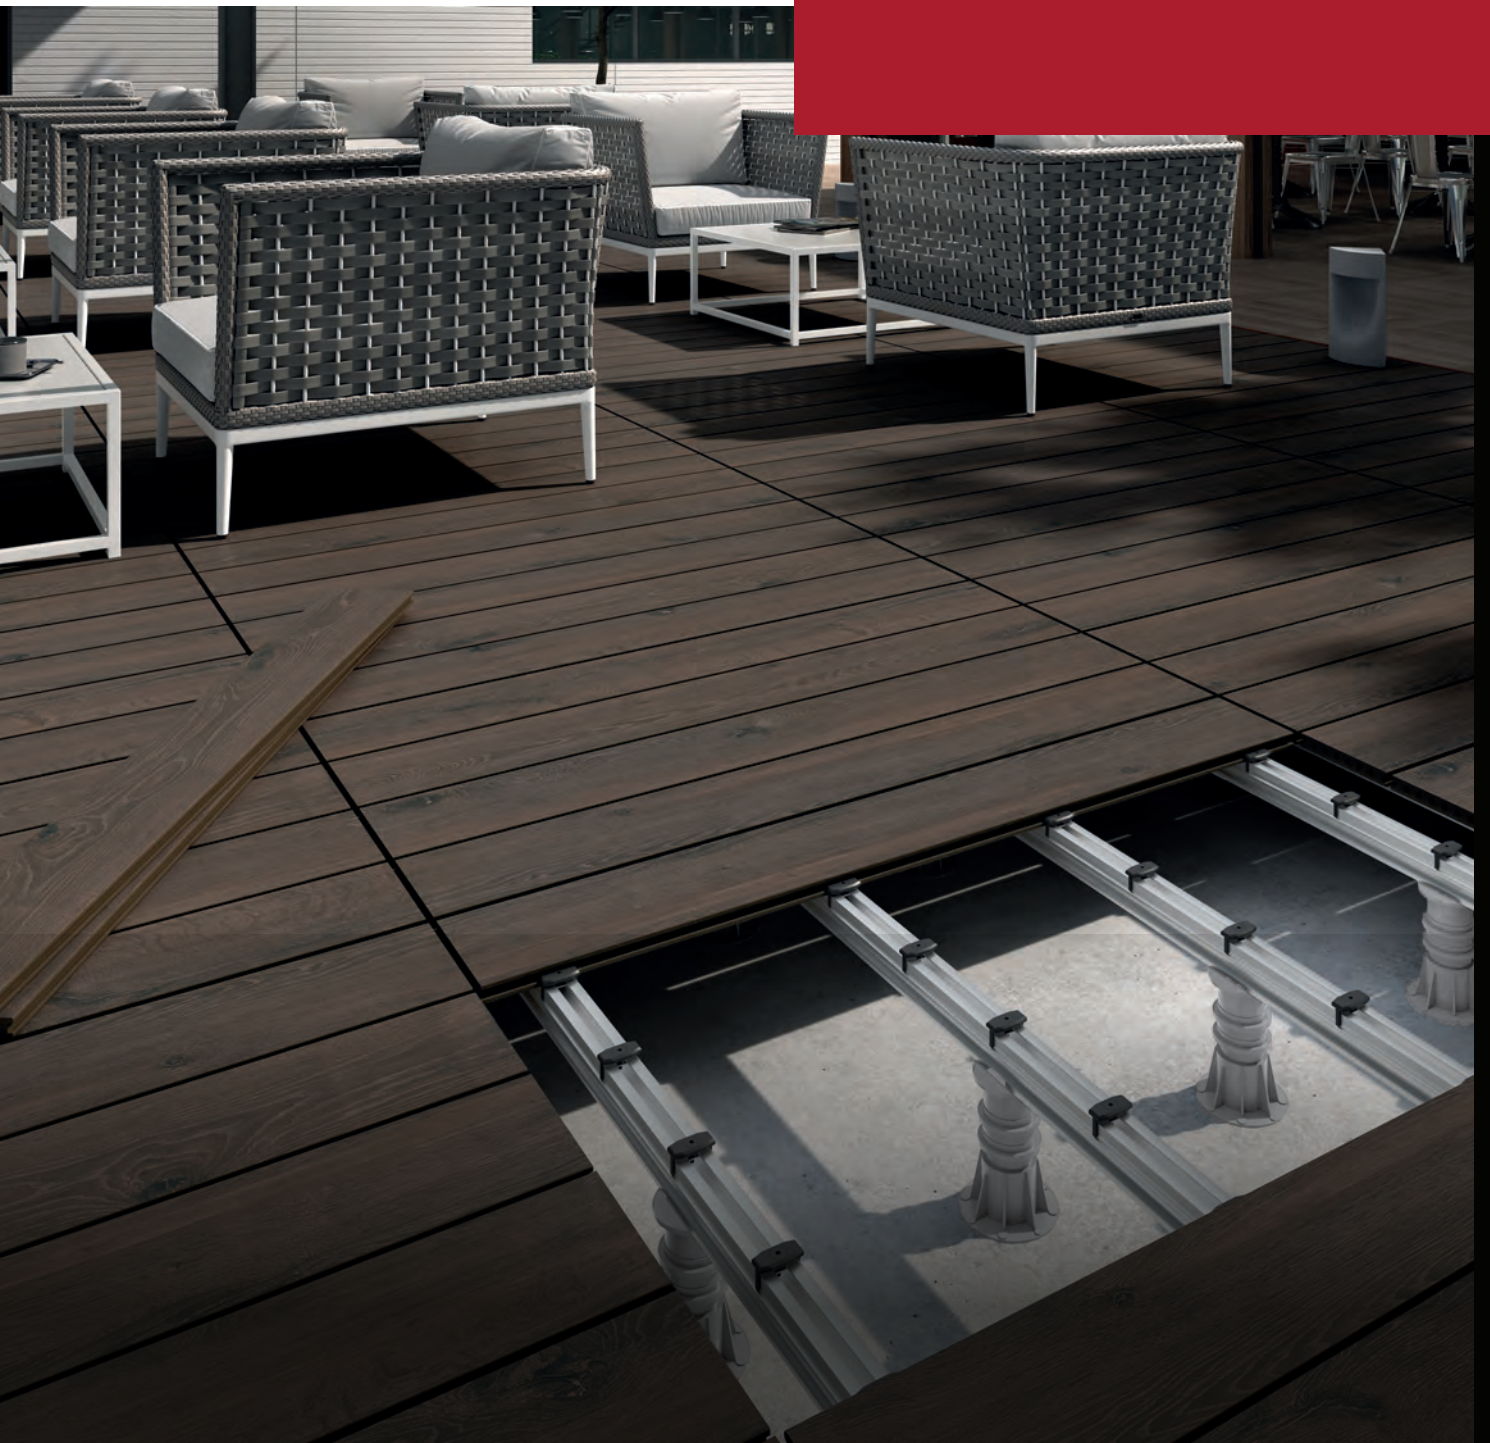

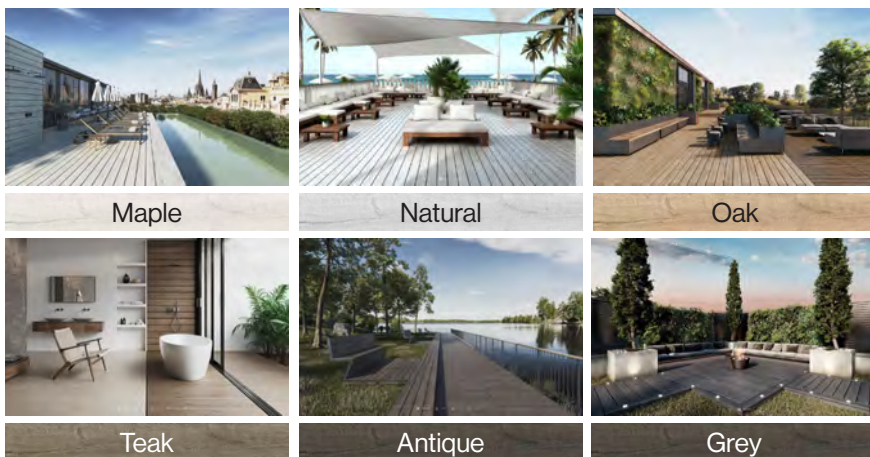

**Whiteriver**

composite for living

**EXADECK DECKING  
SPECIFICATION SHEET**

**SIZES: 26 X 141 X 1217MM**

CLASS A RATED  
PORCELAIN DECKING

PRODUCT DESIGN	INFORMATION
Board Size	26 x 141 x 1217mm
Board Coverage	5.65 Boards per m <sup>2</sup>
Range	Whiteriver Exadeck AP
Guarantee	30 Years
Board Length	1217mm
Board Width	141mm
Board Thickness	26mm
Joist spacing	400mm

DESCRIPTION	STANDARD	REQUIRED	RESULTS
Fire Classification	EN 13501-1	-	Class A1
Sizes Length and Width Thickness Straightness of sides Rectangularity Surface Flatness	ISO 10545-2	±1,0% ±2,0mm ±10% ±0,5% ±1,0% ±0,5%	±0,6% ±2mm ±5% ±1,2mm ±0,5% ±2mm ±0,5% ±0,5
Water Absorption	ISO 10545-3	≤ 0,5%	≤ 0,5%
Breaking Strength	ISO 10545-4	≥ 3000 N	≥ 15.000 N
Resistance to surface abrasion	ISO 10545-7	1-5	5
Resistance to thermal shock	ISO 10545-9	Required	Guaranteed
Crazing resistance	ISO 10545-11	Required	Guaranteed
Frost resistance	ISO 10545-12	Required	Guaranteed
Chemical resistance	ISO 10545-13	Min. B	A/LA/HA
Stain resistance	ISO 10545-14	Min. Class 3	Class 5
Slip resistance (Pendulum Test)	EN 16165 ANEXO C	Required (C.T.E)	Class 3
Slip resistance (Shod ramp test)	EN 16165 ANEXO B	-	Min. R11
Slip resistance (Barefoot ramp test)	EN 16165 ANEXO A	-	Guaranteed

Extruded Porcelain Stoneware

## Porcelain Deckboard - Decórs



Natural

Maple

Oak

Teak

Antique

Grey



Deck Board

**14,1x121,7x2,6 cm\***  
5.6" x 47.9" x 1.0"

- C-3
- R11
- CLASS C



\*sección pieza. piece section.



Perimeter Board

**14,1x121,7x2,6 cm\***  
5.6" x 47.9" x 1.0"


- C-3
- R11
- CLASS C



Extruded Porcelain Stoneware

## Porcelain Deckboard - Dimensions

Board

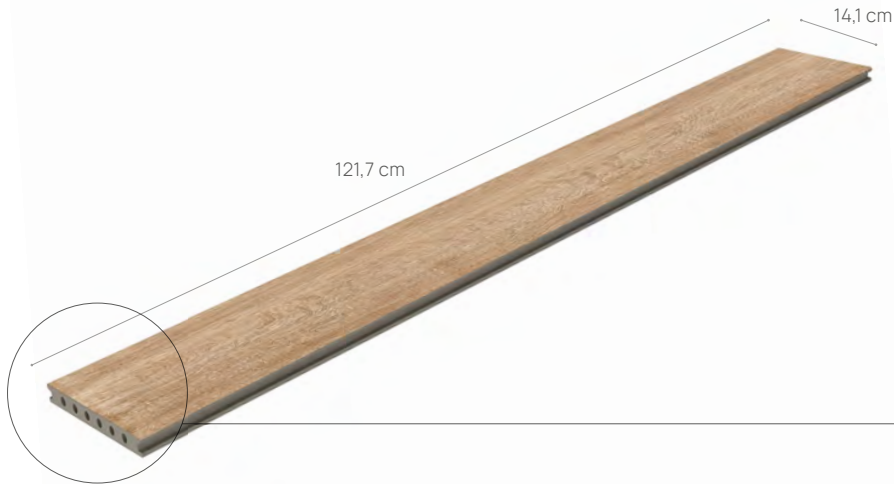













Natural

Maple

Teak

Antique

Grey

					
Size	Pieces	Kg/Box	Boxes/pallet	Kg/Pallet	
 <b>Deck Board</b> 14,1x121,7x2,6 cm	2 5,65 pcs/m <sup>2</sup>	16,64	52	866	
 <b>Board Perimeter</b> 14,1x121,7x2,6 cm	-	-	-	-	
 <b>Aluminum Joist</b> 3,5x2,5x220 cm	300 uds/pack	324	-	1,08 kg/ud	
 <b>Aluminum Joist Pro</b> 4x4x220 cm 40 x 40 x 2200 40 x 40 x 4000	100 uds/pack	145	-	1445	
 <b>Aluminum Joist Pro</b>	100 uds/bag	1,25 kg/bag	8 bags/box	0,0125 kg/pc	
 <b>Starter / End Clip</b> 10 MM.	25 uds/box	0,2375	-	0,0095 kg/pc	
 <b>Rubber Strip</b>	5 rolls/box	2,5	-	0,5 kg/pc	
 <b>Stainless Steel Screw &amp; Plu</b> <b>6 x 60 Screw and Plu</b> (if fixing joist to substrate)	50 pcs/box	0,5 kgs/box	-	0,01 kg/pc	

\*\*Minimum order: box of 100 tiles

\*\*Adhesive tape on one side. Rubber rubber with cushioning pad function

\*\*Minimum order: box of 50 tiles


# FIRESOOL PEDESTALS FS 3.5/4.5

TECHNICAL  
DATASHEET


## SPECIFICATIONS

Consists of 2 pieces. The pedestal has a blocking ring which makes sure that the pedestal doesn't screw back with vibrations. The maximum load a Firesol pedestal can withstand is 3.000 kg/terrace pedestal.

Material	gegalvanized material
Surface	100 cm <sup>2</sup>
Outside diameter	138 mm
Weight	290 g/pc
Adjustable height	35-45 mm



 Weatherproof

 Resistant to temperatures between -25 and +70°C

 Capacity: 3.000 kg/m<sup>2</sup>

 Euroclass A1

## OTHER FIRESOL PEDESTALS



## TOP PLATE



## PACKAGING

Quantity in a box 40 pieces/box

# EXADECK

The porcelain stoneware decking system

Exadeck is the only decking system made of extruded porcelain tiles on the market.

As it is an extruded porcelain material specifically for outdoor use, environmental conditions are not an obstacle to its use, as is the case with other materials such as wood, resins or plastics.

Whiteriver

composite for living



# EXADECK

Whiteriver

composite for living





# EXADECK

Whiteriver

composite for living

